

S-Sight


This series simplifies surveillance with high-quality images and enhanced night vision capabilities. Powered by AI (DDA™ Video Analytics) and equipped with Check Point protection for comprehensive monitoring. Choose from rainbow cameras, Motorized Varifocal options, and Anti-Vandal designs for high-security areas.



FEI-2120IPN

12MP Fixed Lens Fish-Eye Camera with IR LED

Ideal for large open spaces, this 12MP Panoramic Fisheye camera can capture footage at a wide angle of 360°. The camera includes a built-in microphone, Digital WDR, BLC, HLC, and 3D-DNR for poor light conditions. Our Fisheye camera FEI-2120IPN can do the work of multiple fixed focus lens cameras.

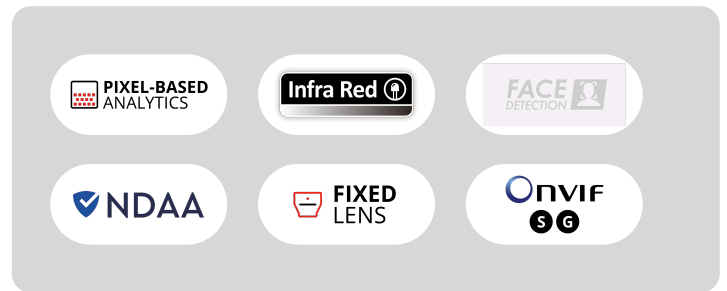

MAIN FEATURES

- FEI-2120IPN 12MP Fixed Lens Fish-Eye Camera with IR LED
- Sensor: 1/1.7" CMOS (3000 x 3000 – 16:9)
- Resolution: 3000×3000 (1:1) 20FPS (12MP)
- Lens: 1.65mm (360° for Ceiling Mount / 180° For Wall Mount)
- True Day&Night – ICR
- Illumination: 15m (4 High-Power IR LEDs)
- Compression: H.265+ / H.264+ / H.265 / H.264 / MJPEG
- Quantum IoT Nano agent by Check Point™
- AI: DDA Human Only in Ceiling Installation: Line Crossing, Sterile Area, Area Entry, Area Exit, Object Counting, Heat Map
- AI: DDA all objects: in Wall/Desktop Installation: Line Crossing, Sterile Area, Area Entry, Area Exit, Object Counting
- Digital WDR, BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 256GB)
- Alarm in + Alarm out
- Built-In Microphone + Audio Input + Audio Output
- ONVIF: Profile S/G
- Water Proof: IP67
- Weight: ~530g
- Power: DC12V/~700mA / PoE/~10.5W



<https://provision-isr.com>

SPECIFICATIONS

3rd Party Cyber Protection	
General	Quantum IoT Nano agent by Check Point™
Protection Methods	Shell injection protection, File Monitor, Import-Table Protection, Dynamic-Memory Protection
NDAA Compliant	
NDAA Compliant	Yes
Video	
Image Sensor	1/1.7" CMOS (3000 x 3000 - 16:9)
Effective Pixels	3000x3000 (1:1)
Electronic Shutter	1/3s ~ 1/100000s
Day & Night	ICR
Min. Illumination	0.01lux (@F2.0, AGC on) 0lux with IR on
Audio	
Audio compression	G.711A/G.711U
Communication	Two-Way Audio
Image	
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	Digital WDR, BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	360
Privacy Zone	Yes
Events and Analytics	
Analytics	AI: DDA Human Only in Ceiling Installation: Line Crossing, Sterile Area, Area Entry, Area Exit, Object Counting, Heat Map AI: DDA all objects: in Wall/Desktop Installation: Line Crossing, Sterile Area, Area Entry, Area Exit, Object Counting
Motion Detection	Yes
Compression	

Resolution	12MP(4000x3000), 9MP(3000x3000), 5MP(2160x2160), 2MP(1080x1080) , 960x960, 720x720, 480x480
Frame Rate	1-25/30FPS
Video Compression	H.265+ / H.264+ / H.265 / H.264 / MJPEG**
Multi-Stream	<p>Mode1: Fisheye Fisheye view (main stream): 3000x3000/2160x2160/1080x1080 (50Hz: 1~25fps; 60Hz: 1~30fps) Fisheye view (sub stream): 1440x1440/720x720/480x480 (50Hz: 1~25fps; 60Hz: 1~30fps) Fisheye view (third stream): 960x960/ 640x640/360x360(50Hz: 1~25fps; 60Hz: 1~30fps) Mode2: Panoramic Panoramic view (main stream): 4000x3000/3840x2160/3200x1800/2560x1440 (50Hz:1~20fps; 60Hz:1~20fps) Panoramic view (sub stream): 1920x1080/ 960x540/640x480 (50Hz:1~20fps; 60Hz:1~20fps) Panoramic view (third stream): 1280x720/640x360 (50Hz:1~20fps; 60Hz:1~20fps) Mode 3: Fisheye+Panoramic+3 PTZ Fisheye view (main stream): 3000x3000/2160x2160/1080x1080 (50Hz: 1~15fps; 60Hz:1~15fps) Fisheye view (sub stream): 1440x1440/720x720/480x480 (50Hz: 1~15fps; 60Hz:1~15fps) Fisheye view (third stream): 960x960/ 640x640/360x360 (50Hz: 1~15fps; 60Hz:1~15fps) Panoramic view (main stream): 4000x3000/3840x2160/3200x1800/2560x1440 (50Hz:1~10fps; 60Hz: 1~10fps) Panoramic view (sub stream): 1920x1080/ 960x540/640x480 (50Hz:1~10fps; 60Hz: 1~10fps) Panoramic view (third stream): 1280x720/640x360(50Hz:1~10fps; 60Hz: 1~10fps) 3PTZ view: (1280x720) * 3 (50Hz:1~15fps; 60Hz: 1~15fps) Mode 4 Fisheye+ 4 PTZ Fisheye view (main stream): 3000x3000/2160x2160/1080x1080 (50Hz: 1~25fps; 60Hz:1~30fps) Fisheye view (sub stream): 1440x1440/720x720/480x480 (50Hz: 1~25fps; 60Hz:1~30fps) Fisheye view (third stream): 960x960/ 640x640/360x360 (50Hz: 1~25fps; 60Hz:1~30fps) 4PTZ view : (1280x720) * 4 (50Hz:1~15fps; 60Hz: 1~15fps) Mode5 Fisheye+ 4 PTZ Fusion Fisheye view (main stream): 3000x3000/2160x2160/1080x1080 (50Hz: 1~25fps; 60Hz:1~30fps) Fisheye view (sub stream): 1440x1440/720x720/480x480 (50Hz: 1~25fps; 60Hz:1~30fps) Fisheye view (third stream): 960x960/ 640x640/360x360 (50Hz: 1~25fps; 60Hz:1~30fps) 4PTZ fusion view (main stream): 2560x1440 (50Hz:1~20fps; 60Hz: 1~20fps) 4PTZ fusion view (sub stream): 640x360 (50Hz:1~20fps; 60Hz: 1~20fps)</p>
Bit Rate	128Kbps ~ 16Mbps@H.265 / 128Kbps ~ 16Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR

Lens	
Lens (Field of View)	1.65mm (360° for Ceiling Mount / 180° For Wall Mount)
Iris	Fixed Iris
Lens Mount	M12 Mount

Network	
----------------	--

User Access	Supports simultaneous monitoring of up to 6 users with multi-stream real-time transmission
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
Remote Monitoring	IE Browsing, Ossia VMS Software, Provision Cam2 Mobile App
Ethernet	100Mbps
ONVIF	Profile S/G

Connectivity	
Network	RJ45 (+PoE)
Audio Connectivity	Built-In Microphone + Audio Input + Audio Output
Alarm	Alarm in + Alarm out
SD Card	Event/Schedule based Main/Substream recording (Up to 256GB)
Wiegand	N/A

Power	DC Socket
Analog Video Output	CVBS (BNCx1)
Housing	
PoE	Yes
Illumination	15m (4 High-Power IR LEDs)
Power Supply	DC12V/~700mA / PoE/~10.5W
Protection Rate	Water Proof: IP67
Work Environment	-30°C~60°C, 10%~90% Humidity
Bracket	No
Dimensions	Φ130mm×46mm
Weight (gross)	~530g
Hard Reset Button	Yes