



COMPACT PUSH WIRE® connector for junction boxes; 8-conductor terminal block; transparent housing; light gray cover

Item No.: 2273-208



COMPACT PUSH WIRE® connector for junction boxes; 8-conductor terminal block; transparent housing; light gray cover

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	2273-208
GTIN / EAN	4050821027881
Content	1
Order amount	50
Customer item number	

Notes

Technical data


Miscellaneous

Safety information 1	In grounded power lines
Ratings per	IEC/EN 60664-1
Rated voltage (II / 2) [V]	450 [V]
Rated impulse voltage (II / 2) [kV]	4 [kV]
Rated current [A]	24 [A]

Technical data	
Legend (ratings)	(II / 2) Overvoltage category II / Pollution degree 2
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper
Solid conductor	0.5 ... 2.5 mm ² / 18 ... 14 AWG
Strip length	11 mm / 0.43 Inch
Total number of connection points	8
Total number of potentials	1
Type of wiring	Side-entry wiring
Width	18 mm / 0.709 Inch
Height	10.4 mm / 0.409 Inch
Depth	16.7 mm / 0.657 Inch
Color	light gray
Cover color	light gray
Flammability class per UL94	V2
Fire load [MJ]	0.039 [MJ]
Weight [g]	2.17 [g]
Ambient temperature (operation)	60 °C
Continuous operating temperature up to [°C]	105 [°C]
T-Marking per EN 60998	T60
Packaging type	BOX
Main product function	Push-in terminal block
Product type	Splicing connectors

Images & drawings



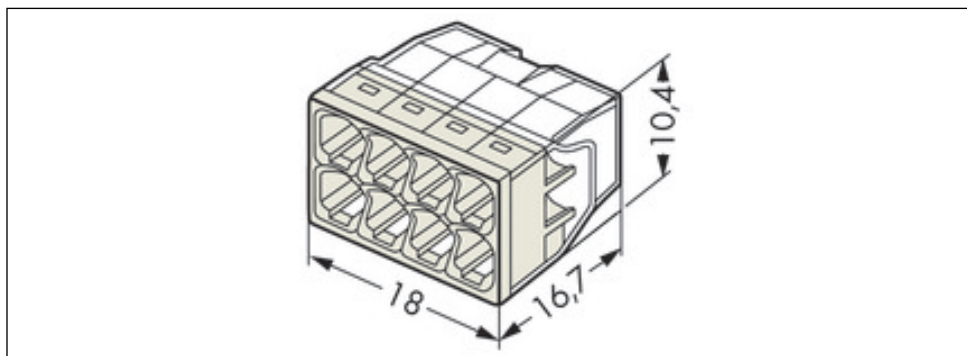

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.