

DS-1331HZ-R


Heat-Resistant Outdoor Housing



Feature

- Side-cover design for convenient installation and maintenance
- Stainless steel dual-hasp design, up to IP 66
- Built-in refrigeration module with 20,000 hours life span
- Applicable to high temperature places, e.g. steel plant, and thermal power plant

Dimension and Wiring

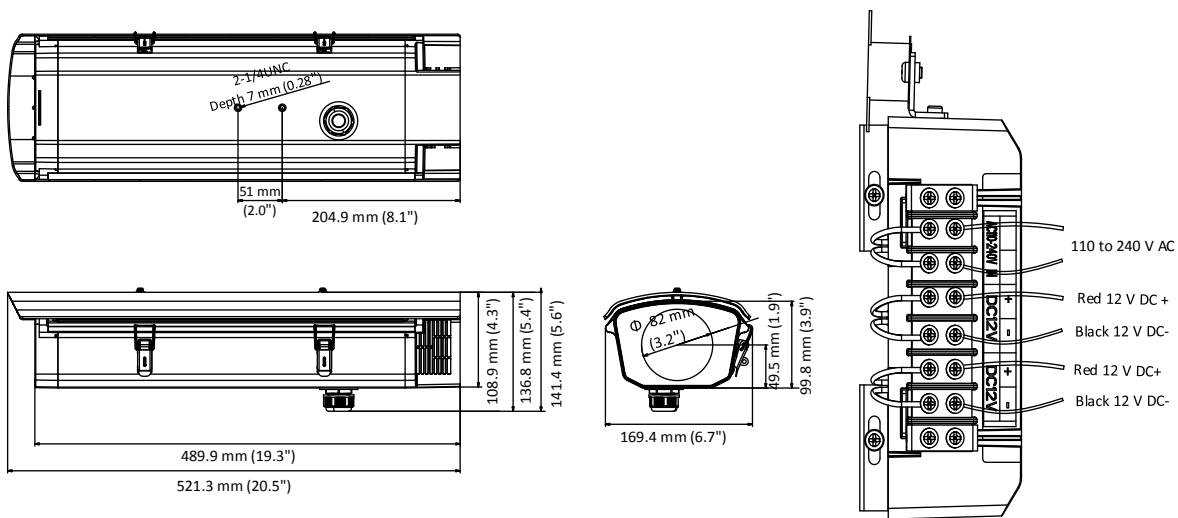

Accessory



DS-1293ZJ Wall Mounting
Bracket



DS-1214ZJ Horizontal Pole
Mounting Bracket



DS-1269ZJ Pendant Mounting
Bracket



DS-1233ZJ Column
Mounting Bracket

Available Model

DS-1331HZ-R

Parameter

Model	DS-1331HZ-R
Parameters	Heat-Resistant Outdoor Housing
Working Temperature	-30° C to 85° C (-22° F to 185° F)
Temperature Control	Refrigeration model enabled, when housing's temperature is over 45° C (113° F)
Power	110 to 240 V AC
Power Consumption	70 W
Material	Main: aluminum alloy
Ingress Protection	IP 66
Dimension	489.9 mm × 169.4 mm × 99.8 mm (19.3" × 6.7" × 3.9")
Weight	3.2 Kg (7.1 lb.)