

NVR12-8200PFAN


8CH 12MP NDAA-compliant Face Recognition NVR with Alarms

Provision-ISR's NVR12-8200PFAN complies with NDAA demands and is a high-performance network video recorder with an integrated 8-channel PoE switch for high-definition surveillance, supporting Face Recognition and advanced Video Analytics (DDA). The device, suitable for small-sized installations (up to 8 channels), features 8 alarm inputs + 8 alarm outputs and provides you with everything you need for a trouble-free CCTV project.

8
CH

CHECK
POINT
EMBEDDED

12
MP

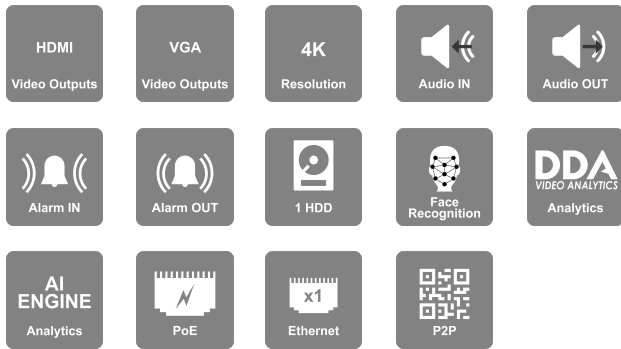

MAIN FEATURES

Video:

- Input: 8 Channel Support
- 8 Channel PoE / Standard Network Connection (Via 8 x RJ-45 / Network)
- Output: HDMI (4K@60Hz, 4K@30Hz, 1080P), VGA (1080P, 1280x1024, 1024x768)

Bandwidth:

- Incoming: 80Mbps
- Outgoing: 80Mbps

Decoding Support:

- H.265S/H.265+/H.265/H264

Analytics:

- Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line), Object Counting (Area), Smart Search, Face Recognition, LPR, Thermal, Crowd Gathering, People Intrusion
- Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition.

Recording:

- 8CH 12MP Real-Time
- FPS: 200 (PAL) / 240 (NTSC)

Playback:

- Local: 8Ch Simultaneously
- Remote: 8Ch Simultaneously

Audio:

- Input: 1CH + IPC Inputs
- Output: 1CH + IPC Output
- 2 Way Audio

Alarm:

- Input: 8+IPC
- Output: 4+IPC

Storage:

- 1 x SATA (Up to 10TB each)

USB Port:

- 2 USB 2.0 Port + 1 USB 3.0 Port

Network:

- 1 x RJ-45: 10/100/1000Mbps Each

Remarks:

- The following features are based on firmware v1.4.12_76576_RD250115 and are subject to firmware version changes.



SPECIFICATIONS

3rd Party Cyber Protection	
General	Quantum IoT Nano agent by Check Point™
Protection Methods	Shell injection protection, File Monitor, Import-Table Protection, Dynamic-Memory Protection
NDAA Compliant	
NDAA Compliant	Yes
Video	
Video Input	8Ch over Network
Output	HDMI (4K@60Hz, 4K@30Hz, 1080P), VGA (1080P, 1280x1024, 1024x768)
View Mode	Mirrored
Fish-Eye Dewarp	Local + Web
Decoding Format	H.265 / H.265+ / H.265S / H.264
Decoding Capabilities	1Ch - 12MP ; 4Ch - 4MP ; 8CH - D1
Audio	
Audio-specs-Input	1CH RCA (Linear, 1kΩ) + IPC inputs
audio-specs-Output	1CH RCA (2.0 Vp-p, 1 kΩ) + IPC outputs IP Speaker
Compression	G.711A/G.711U
Two Way Audio	Yes
Analytics	
Supported Analytics	Camera Tampering, DDA2 With Object Classification, Line Crossing (DDA / Pixel Based), Sterile Area (DDA / Pixel Based), Object Monitoring, Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line), Object Counting (Area), Smart Search, Face Recognition, LPR, Thermal, Crowd Gathering, People Intrusion Advanced Face Recognition Mode: Supports 2 Non-AI IPCs and performs face detection and recognition.
Analytics Channels (IPC Based)	8Ch (Requires supporting IPC)
Analytic Channels (NVR Based)	Up to 2Ch DDA1 (Sterile Area/Line Crossing) or Up to 2Ch Face Detection + Recognition or Up to 6Ch Face Recognition (IPC does Detection) (or their combinations)
Face Recognition Rate	18 Faces per second (6Ch supported)
Bandwidth	
Incoming	80Mbps

Outgoing	80Mbps
Record/ Main Stream	
Real-Time Recording	8CH 12MP Real-Time
Record Type	Video / Video + Audio
Recording Modes	Schedule, Manual, Motion, Sensor, Analytics, POS and all of its combinations
16MP	N/A
12MP	240FPS(NTSC)/200FPS(PAL)
8MP	240FPS(NTSC)/200FPS(PAL)
5MP and lower	240FPS(NTSC)/200FPS(PAL)
Master stream over network	Up to 12CH@Recording Resolution
Substream	
Resolution substream	Depends on IPC
Remote view	
Max Channel View	40Ch (Limited to Outgoing Bandwidth Capacity)
Remote Applications	
User Access	64 Users online with Professional Authority Management
Mobile App	Provision Cam2 for iOS/Android
PC/Mac Software	Ossia VMS Standard / Enterprise
Plug-in free Web-Browser	Chrome, FireFox, Safari, Edge, Opera. (All Limited to 4Ch Live View / Playback) *P2P WEB connection always requires Plugin
Plug-in based Web-Browser	Internet Explorer
Playback	
Local	8Ch
Remote	8Ch

Search Mode	DDA Object, Smart Search, LPR, Face Recognition, Time-Slice, Time, Event, POS
--------------------	---

Backup

USB	2 USB 2.0 Port + 1 USB 3.0 Port
------------	---------------------------------

Backup Format	AVI (Unencrypted) / Private Format (Encrypted / Unencrypted)
----------------------	--

Alarm

Alarm-in	8+IPC
-----------------	-------

Alarm-out	4+IPC
------------------	-------

Storage

HDD	1
------------	---

HDD Max Capacity	10TB
-------------------------	------

E-Sata Support	No
-----------------------	----

Total HDD Max Capacity	10TB
-------------------------------	------

RAID	N/A
-------------	-----

PTZ

Connection	via Network
-------------------	-------------

Supported Controls	Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus
---------------------------	--

RS-485	Yes (C06 Keyboard Connection)
---------------	-------------------------------

Network

Ethernet	1000/100/10Mbps self-adaptive Ethernet interface
-----------------	--

Protocols	TCP/IPv4/IPv6, DHCP, DDNS, NTP, SMTP, SSL/TLS, UPnP, P2P, RTSP, FTP, HTTPS, 820.1X, SNMP, Auto Report Input + Output (Ossia VMS)
------------------	--

ONVIF	Full Device Support (Profile T/G, ONVIF Version 20.12)
--------------	--

PoE

PoE Ports	8xRJ45
------------------	--------

NVR12-8200PFAN

Speed	10/100Mbps (10Mbps under CCTV Mode)
Standard	PoE (IEEE802.3AF/AT)
CCTV Mode	Yes (Up to 200m and 10Mbps bandwidth)
Total Power	80W (Average 10W per Channel)
Max. Power Output (Per Ch.)	~15W

Others	
Power Supply	DC 48V/2.5A
Power consumption (No HDD)	20W
Dimension	W300xD250xH50mm
Operation Temperature	0°C~50°C